


# pipetman®

L



## INCREASED COMFORT AND PRODUCTIVITY

Air-Displacement Pipettes



**Designed for performance and comfort, PIPETMAN® L offers a comprehensive range of models, adapted to all your needs.**

### Convenient Use

Lightweight and balanced, PIPETMAN L combines an ergonomic design with minimized pipetting forces, giving you the ability to pipette longer without fatigue.

Right-handed or left-handed? No problem. Adjust the location of the tip ejector to the most comfortable position for you.

### Secure Pipetting

Reduce pipetting errors and avoid accidental volume changes during pipetting cycles with a true volume-locking mechanism for improved accuracy and precision.

PIPETMAN L variable volume models are all fully autoclavable without disassembly for maximum convenience and protection from cross-contamination.

### Extended Range

Available as a fixed or variable volume, the PIPETMAN L line covers a full volume range from 0.2  $\mu\text{L}$  to 10 mL for single-channel models, and from 0.5  $\mu\text{L}$  to 1200  $\mu\text{L}$  for multichannel models. Precise, accurate, and reliable, they can be intensively used with confidence in many applications.

Four PIPETMAN L multichannel models (product description ending with VR), covering a volume range from 20  $\mu\text{L}$  to 300  $\mu\text{L}$ , are equipped with V-rings at the bottom of the tip holders for a proper fit with most tip brands.



Adjustable Tip Ejector



## Choose your Tip Ejector

For single channel models, choose between a model with a stainless-steel tip ejector or a plastic ejector depending on your needs and applications.\*

Large volume models are equipped with a plastic tip ejector to avoid any direct contact with the tip.



## Choose your Model


Choose your channel number and volume range, up to 1200 µL for various protocols.

Four PIPETMAN L multichannel models equipped with V-rings (VR) offer an improved compatibility with tips from other brands.



## Choose your Pipette Stand

Different pipette stands and holders allow you to store pipettes vertically, protecting them from contamination.

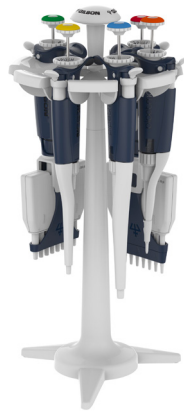

### PIPETMAN L Single Channel – Variable Volume Models

Model	PIPETMAN® DIAMOND Tips		Part Number	Volume (µL)
P2L	D10 DL10	DF10ST DFL10ST	FA10001P	0.2 - 2
			FA10001M	
P10L	D10 DL10	DF10ST DFL10T	FA10002P	0.5 - 10
			FA10002M	
P20L	D200	DF30ST	FA10003P	2 - 20
			FA10003M	
P100L	D200	DF100ST	FA10004P	10 - 100
			FA10004M	
P200L	D200 D300	DF200ST DF300ST	FA10005P	20 - 200
			FA10005M	
P1000L	D1000 D1200	DF1000ST DF1200ST	FA10006P	100 - 1000
			FA10006M	
P5000L	D5000		FA10007	500 - 5000
P10mLL	D10mL		FA10008	1000 - 10000

\*For a pipette with a plastic tip ejector, the part number ends with the letter P.

For a pipette with a stainless steel tip ejector, the part number ends with the letter M, from P2L to P1000L.

### PIPETMAN L Multichannel Models

Model	PIPETMAN® DIAMOND Tips		Part Number	Volume (µL)
P8x10L	D10 DL10	DF10ST DFL10ST	FA10013	0.5 - 10
P12x10L			FA10014	
P8x20L	DL10 D200	DFL10ST DF30ST	FA10009	2 - 20
P12x20L			FA10010	
P8x200L	D200 D300	DF200ST DF300ST	FA10011	20 - 200
P12x200L			FA10012	
P8x200LVR	D200 D300	DF200ST DF300ST	FA10035	20 - 200
P12x200LVR			FA10036	
P8x300L	D200 D300	DF200ST DF300ST	FA10015	20 - 300
P12x300L			FA10016	
P8x300LVR	D200 D300	DF200ST DF300ST	FA10037	20 - 300
P12x300LVR			FA10038	
P8x1200L	D1200	DF1200ST	FA10039	100 - 1200
P12x1200L			FA10040	



PIPETMAN L single channel models are available in kits, offering the essential pipetting tools to start an experiment right away.



For routine testing applications, PIPETMAN L is also available as a fixed volume version, covering a volume range from 1 µL to 5 mL.



PIPETMAN DIAMOND® Tips are designed to fit your PIPETMAN perfectly and guarantee maximum accuracy and precision.

For ordering information, visit [www.gilson.com](http://www.gilson.com)

### Pipette Stands

Description	Part Number
CARROUSEL Pipette Stand (7 pipettes)	F161401
TRIO Pipette Stand (3 pipettes)	F161405
Universal Multichannel Stand	F161417
SINGLE Pipette Holder	F161406

[gilson.com/contactus](http://gilson.com/contactus)

**ISO 9001**  
CERTIFIED

LT800606/A | ©2021 Gilson S.A.S.  
All rights reserved. All trademarks  
are the property of Gilson, Inc.  
and its subsidiaries.

**GILSON®**